

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 August 2003 (07.08.2003)

PCT

(10) International Publication Number  
**WO 03/065635 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 5/02, 27/26**

(21) International Application Number: **PCT/EP03/00596**

(22) International Filing Date: 22 January 2003 (22.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

02290219.1	31 January 2002 (31.01.2002)	EP
02290289.4	6 February 2002 (06.02.2002)	EP

(71) Applicant (*for all designated States except US*): **MOTOROLA INC** [US/US]; 1303 E.Algonquin Road, Schaumburg, IL 60196 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **DE COURVILLE, Marc** [FR/FR]; Motorola Centre De Recherche, Parc Technologique De St Aubin, Route de l'arme Au Merisier, Immeuble Columbia, F-91190 Gif-Sur-Yvette (FR).

**MAILLE, Patrick** [FR/FR]; 46, rue de la Rabine, F-35510 Cesson-Sevigne (FR). **DEBBAH, Merouane** [FR/AT]; Grohgasse 82b, A-1050 Wien (AT).


(74) Agent: **WHARMBY, Martin**; Motorola Centre De Recherche, Parc Technologique De St Aubin, Route de l'arme Au Merisier, Immeuble Columbia, F-91190 Gif-Sur-Yvette (FR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,

[Continued on next page]

(54) Title: RECEPTION OF MULTICARRIER SPREAD- SPRECTRUM SIGNALS

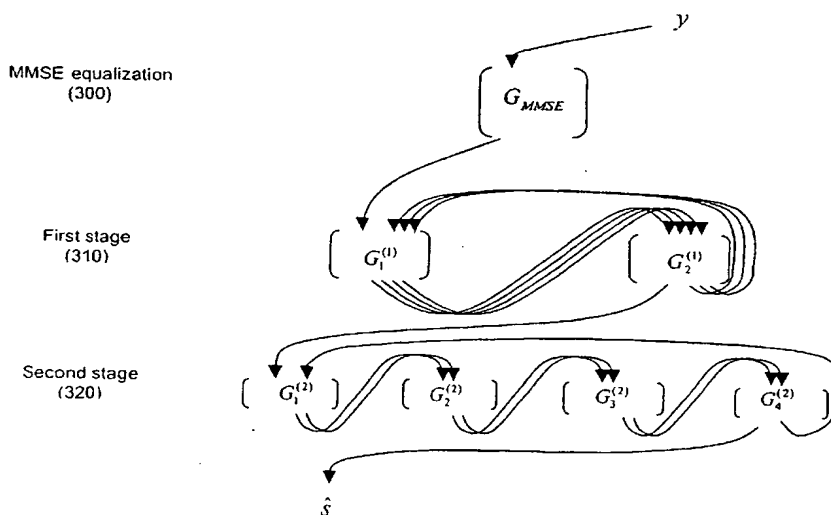

(57) Abstract: A system (100), receiver (160-190) and method of operation for spread OFDM wireless communication (single user OFDM-CDMA with cyclic-prefix) by: equalizing the received spread OFDM signal ( $y$ ) and splitting it into first and second portions ( $s_1, s_2$ ); making a decision on the second portion and subtracting the second portion from the received signal to produce a first difference signal; processing the first difference signal to recover the first portion of the received signal in which symbol interfering terms of the second portion are substantially reduced; making a decision on the first portion and subtracting the first portion from the received signal to produce a second difference signal; and processing the second difference signal to recover the second portion of the received signal in which symbol interfering terms of the first portion are substantially reduced. The process may be iterated extensively at this stage. In a second stage, the recovered received signal is split into a greater number of portions (e.g. 4) and processed similarly to further reduce interference.



SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

- 1 -

## RECEPTION OF MULTICARRIER SPREAD-SPECTRUM SIGNALS

## 5 Field of the Invention

This invention relates to multicarrier wireless communication systems, and more specifically Orthogonal Frequency Division Multiplex (OFDM) modulation schemes.

10

## Background of the Invention

Such modulation schemes are now widely used in standards as a means to provide high data rates for communication systems including wireless local area networks (WLANs): 'IEEE 802.11a' in USA and 'HIPERLAN/2' in Europe, ADSL (Asynchrouous Digital Subscriber Line) over twisted pairs and 'HomePLUG' on powerlines.

20

For the next decade, the challenge is to deliver an increased data rate coping with the requirements of multimedia broadband transmissions. None of the existing standards will be able to meet these requirements on a larger scale (involving many users) which motivates the search for more robust yet simple modulation schemes that, combined with an appropriate decoding algorithm, show better performance in terms of Packet Error Rate (PER) than classical OFDM systems. This technical criterion translates directly into increased system throughput. Clearly, an attractive property for such a

30

- 2 -

new modulation scheme would be for it to be viewed as a simple extension of OFDM so that it could be implemented in existing standards as a proprietary transmission mode. In this way it could also provide a means for smooth  
5 transition to new standards.

In the field of this invention, enhancements have been proposed as a workaround for alleviating an inherent OFDM weakness: when a carrier is subject to a strong channel  
10 attenuation, even in absence of noise, the data conveyed is irremediably lost. The classical alternative is to use forward error correction (FEC) coding to spread the information along the carriers, but another strategy has been proposed: to combine the strength of OFDM and CDMA  
15 by pre-processing the block of symbols to be transmitted by a unitary spreading matrix  $\mathbf{W}$  (often chosen to be a Walsh Hadamard transform for its attractive implementation properties) prior to the FFT/IFFT (Fast Fourier Transform/Inverse FFT) modulation.

20

This redundantless precoder  $\mathbf{W}$  has the role of uniformly spreading the information to be transmitted on all the carriers so that even if one carrier is unrecoverable, the information transmitted can still be retrieved by  
25 decoding of other subbands.

Implementations of such spread OFDM (SOFDM also known as single user OFDM-CDMA with cyclic prefix) modulation techniques require successive interference cancellation  
30 (SIC), and many SIC algorithms have been proposed. One of the most well known is 'V-BLAST' proposed by Bell Labs

- 3 -

for multiple antennas systems in the publication by G.J. Foschini and M.J. Gans, "On Limits of Wireless Communications in a fading Environment when Using Multiple Antennas", *Wireless Personal Communications* 5 6:311-335, 1998. However, it has been demonstrated (in the publication by P. Loubaton, M. Debbah and M. de Courville, "Spread OFDM Performance with MMSE Equalization", in *International Conference on Acoustics, Speech, and Signal Processing*, Salt Lake City, USA, May 10 2001) that V-BLAST algorithms are not suited for conventional SOFDM systems due to the averaging of the SNRs (signal/noise ratios) at the receiver across the carriers during the despreading step. Moreover, such approaches lead to a tremendous decoding complexity due 15 to the computation of several pseudo inverse matrices.

A need therefore exists for an OFDM communication system and decoding algorithm for use therein wherein the abovementioned disadvantage(s) may be alleviated. 20

#### Statement of Invention

In accordance with a first aspect of the present invention there is provided a spread OFDM wireless 25 communication system as claimed in claim 1.

In accordance with a second aspect of the present invention there is provided a spread OFDM wireless 30 communication system as claimed in claim 10.

- 4 -

In accordance with a third aspect of the present invention there is provided a receiver, for use in a spread OFDM wireless communication system, as claimed in claim 11.

5

In accordance with a fourth aspect of the present invention there is provided a receiver, for use in a spread OFDM wireless communication system, as claimed in claim 18.

10

In accordance with a fifth aspect of the present invention there is provided a method, of operating a receiver in a spread OFDM wireless communication receiver, as claimed in claim 19.

15

In accordance with a sixth aspect of the present invention there is provided a method, for performing minimum mean square error equalization in a spread OFDM wireless communication system, as claimed in claim 27.

20

In one aspect, the present invention provides a new, efficient yet simple, low complexity decoding algorithm for an enhanced OFDM modulator.

25 Preferably the OFDM modulator is based on a Walsh-Hadamard transform, allowing exploitation of the mathematical properties of a Walsh-Hadamard precoder.

30 In one form, the new decoding algorithm consists in splitting a received block into two equal parts, one of the parts being decoded first and then subtracted from

- 5 -

the received vector to suppress part of the interference and the other of the parts being decoded next. This iterative procedure can be further extended by successive block splitting and results in a multi-resolution

5 decoding algorithm. An attractive property of this algorithm is that although it still relies on the computation of pseudo-inverses, the expressions of these pseudo-inverses are easy to derive and consist simply in the product of a diagonal matrix by a Walsh Hadamard

10 transform. Thus, using Walsh Hadamard spreading sequences, the inherent complexity penalty of a V-BLAST decoding schemes is simply removed. This allows a significant gain in performance (e.g., around 3-4dB compared to MMSE SOFDM) with only a modest increase in

15 complexity, which motivates:

- i) the use of such new modulation schemes in practice and
- ii) their proposal as a solution for future wireless LAN standards.

20

The following technical merits of the new multi-resolution decoding algorithm can be highlighted:

- Low arithmetical complexity compared to existing SIC BLAST techniques with same or better performance.
- 25 • Flexibility and scalability of the method (it is possible to adjust the number of iterations to be performed based on a performance/complexity tradeoff).
- Can be combined into all OFDM standards as a
- 30 proprietary transmission mode (since it can be

- 6 -

viewed as a simple extension of current OFDM systems)

- Yields a significant PER performance enhancement compared to classical OFDM and minimum mean square error (MMSE) SOFDM receivers (e.g., 3dB).

### Brief Description of the Drawings

10 One OFDM single user communication system and decoding algorithm for use therein incorporating the present invention will now be described, by way of example only, with reference to the accompanying drawing(s), in which:

15 FIG. 1 shows a block schematic diagram of a OFDM-CDMA (spread OFDM) single user communication system;

FIG. 2 shows a block schematic representation of the system of FIG. 1 modeled in the frequency domain;

20

FIG. 3 shows a diagrammatic binary tree representation of the two-stage multi-resolution decoding algorithm used in the system of FIG. 1;

25 FIG. 4 and FIG. 5 show graphical representations of simulation performance of the multi-resolution decoding algorithm compared with other decoding scenarios under different respective channel profiles in terms of BER (bit error rate) as a

30 function of  $\frac{E_b}{N_0}$  (energy per bit / noise energy).



- 7 -

**Description of Preferred Embodiment(s)**

5 As will be explained below, the decoding algorithm to be described significantly enhances performance compared to MMSE equalized SOFDM scheme, with a complexity excess that is marginal compared to V-BLAST decoding strategies.

10

Consider the dimension  $N \times 1$  vector  $s$  representing the block of complex valued symbols to be transmitted (each one belonging to a finite alphabet called constellation, e.g., QPSK, QAM, etc.). The overall  
15 Spread-OFDM transmission system of interest 100 depicted in FIG. 1 includes, in a transmitter, a spreading matrix module 110, a module 120 providing modulation, a module 130 providing guard interval insertion and parallel-to-serial conversion, and a  
20 digital-to-analog converter 140. The transmitter is coupled via a wireless communication channel 150 to a receiver including a mixer and analog-to-digital converter 160, a module 170 providing guard interval suppression and serial-to-parallel conversion, a  
25 module 180 providing demodulation, and a module 190 providing demodulation.

The system of FIG. 1 can be modelled directly in the frequency domain as illustrated in FIG. 2 so that the  
30 received vector  $y$  expresses as:

$$y = H W s + b = M s + b$$

- 8 -

where:

$H$  is a  $N \times N$  diagonal matrix, bearing the complex frequency channel attenuations,

5  $W$  is a  $N \times N$  unitary Walsh Hadamard spreading matrix, whose particular recursive structure is exploited in the decoding algorithm to reduce complexity,

$b$  is a  $N \times 1$  complex white IID (independent and identically distributed) Gaussian noise vector whose  
10 component variance is  $E\|b_k\|^2 = \sigma^2$  ( $E$  representing the mathematical expectation operator).

In the following analysis,  $H$ ,  $W$  and  $\sigma^2$  are assumed to be known at the receiver by any given classical  
15 estimation technique.

The procedure described below deals with the retrieval of the information vector  $s$  based on the received vector  $y$  which is referred as the equalization step.  
20 Instead of using a traditional MMSE equalizer, a specific successive interference cancellation algorithm (termed a 'multi-resolution decoding algorithm') will be described. In the following analysis,  $()^h$  is defined as the Hermitian transpose  
25 operator and  $I_N$  is defined as the  $N \times N$  identity matrix.

The multi-resolution decoding algorithm is based on the following steps:

(i) Decode the received  $y$  vector by an MMSE  
30 equalizer followed by a non-linear decision

- 9 -

function denoted by  $dec()$  (e.g., hard decision demapper, soft decision, etc.)  $\hat{s} = dec(G_{MMSE} y)$  where  $G_{MMSE} = M^h (M M^h + \sigma^2 I_N)^{-1}$  (convenient implementations of the product  $G_{MMSE} y$  are detailed below).

5

- (ii) Split the vector  $\hat{s}$  in two equal size  $N/2$  parts

$$\hat{s} = \begin{bmatrix} \hat{s}_1 \\ \hat{s}_2 \end{bmatrix}.$$

10

- (iii) Subtract the second half  $\hat{s}_2$  of the vector  $\hat{s}$  from the received vector  $y$  to remove the interference generated by the first half of  $s$  (treating  $s_2$  as if  $\hat{s}_2 = s_2$ ).

15

- (iv) Perform an MMSE equalization of the resulting  $y_1$  half-sized vector by matrix  $G_1$ , followed by the decision function  $dec()$  for obtaining a more reliable estimate  $\hat{\hat{s}}_1$  of  $s_1$  than  $\hat{s}_1$ .

- (v) Possibly reiterate the procedure, this time on the first half of  $\hat{s}$  for retrieving a better estimate  $\hat{\hat{s}}_2$  of  $s_2$  than  $\hat{s}_2$ .

20

- (vi) These operations can be repeated substituting  $\hat{s}_1$  and  $\hat{s}_2$  by  $\hat{\hat{s}}_1$  and  $\hat{\hat{s}}_2$  respectively

Translated into equations, this amounts to the following steps:

25 *First stage (310) of the multi-resolution decoding algorithm*

- 10 -

Step 0, (300) : MMSE equalization of  $y: \hat{s} = \begin{bmatrix} \hat{s}_1 \\ \hat{s}_2 \end{bmatrix} = \text{dec}(G_{MMSE}$

$y)$

Step 1 :  $y_1 := y - M \begin{bmatrix} 0 \\ \hat{s}_2 \end{bmatrix} = M \begin{bmatrix} s_1 \\ s_2 - \hat{s}_2 \end{bmatrix} + b$

Step 2 : MMSE equalization of  $\hat{s}_1$  :  $\hat{s}_1 = \text{dec}(G_1^{(1)}) y_1$

5 Step 3 :  $y_2 := y - M \begin{bmatrix} \hat{s}_1 \\ 0 \end{bmatrix} = M \begin{bmatrix} s_1 - \hat{s}_1 \\ s_2 \end{bmatrix} + b$

Step 4 : MMSE equalization of  $\hat{s}_2$  :  $\hat{s}_2 = \text{dec}(G_2^{(1)}) y_2$

Step 5 :  $\hat{s} = \begin{bmatrix} \hat{s}_1 \\ \hat{s}_2 \end{bmatrix} := \begin{bmatrix} \hat{s}_1 \\ \hat{s}_2 \end{bmatrix}$

Step 6 : go to Step 1

10 It should be noted that although as stated above only a subdivision by two of the received vector  $y$  is performed, in its more generalized form the procedure can apply to smaller subdivisions of  $y$  of length  $N$  divided by a power of 2:  $N/2^k$  for any integer  $k$  such  
15 that the result remains an integer. The generalized algorithm consists in reiterating the procedure already explained to each resulting sub-block of  $y$ . Let stage  $i$  of the algorithm define the operations performed for a level of subdivisions of  $y$  in blocks  
20 of size  $N/2^i$ .

As an illustration, the second stage of the proposed multi-resolution algorithm results in the following operations:

25

- 11 -

Second stage (320) of the multi-resolution decoding algorithm

$$\text{Step 0: form } \hat{s} = \begin{bmatrix} \hat{s}_1 \\ \hat{s}_2 \\ \hat{s}_3 \\ \hat{s}_4 \end{bmatrix}$$

$$\text{Step 1 : } y_1 := y - M \begin{bmatrix} 0 \\ \hat{s}_2 \\ \hat{s}_3 \\ \hat{s}_4 \end{bmatrix} = M \begin{bmatrix} s_1 \\ s_2 - \hat{s}_2 \\ s_3 - \hat{s}_3 \\ s_4 - \hat{s}_4 \end{bmatrix} + b$$

5 Step 2 : MMSE equalization of  $\hat{s}_1$  :  $\hat{s}_1 = \text{dec}(G_1^{(2)} y_1)$

$$\text{Step 3 : } y_2 := y - M \begin{bmatrix} \hat{s}_1 \\ 0 \\ \hat{s}_3 \\ \hat{s}_4 \end{bmatrix} = M \begin{bmatrix} s_1 - \hat{s}_1 \\ s_2 \\ s_3 - \hat{s}_3 \\ s_4 - \hat{s}_4 \end{bmatrix} + b$$

Step 4 : MMSE equalization of  $\hat{s}_2$  :  $\hat{s}_2 = \text{dec}(G_2^{(2)} y_2)$

$$\text{Step 5 : } y_3 := y - M \begin{bmatrix} \hat{s}_1 \\ \hat{s}_2 \\ 0 \\ \hat{s}_4 \end{bmatrix} = M \begin{bmatrix} s_1 - \hat{s}_1 \\ s_2 - \hat{s}_2 \\ s_3 \\ s_4 - \hat{s}_4 \end{bmatrix} + b$$

Step 6 : MMSE equalization of  $\hat{s}_3$  :  $\hat{s}_3 = \text{dec}(G_3^{(2)} y_3)$

$$10 \text{ Step 7 : } y_4 := y - M \begin{bmatrix} \hat{s}_1 \\ \hat{s}_2 \\ \hat{s}_3 \\ 0 \end{bmatrix} = M \begin{bmatrix} s_1 - \hat{s}_1 \\ s_2 - \hat{s}_2 \\ s_3 - \hat{s}_3 \\ s_4 \end{bmatrix} + b$$

Step 8 : MMSE equalization of  $\hat{s}_4$  :  $\hat{s}_4 = \text{dec}(G_4^{(2)} y_4)$

Step 9 :  $\hat{s} := \hat{s}$

Step 10 : go to Step 1

- 12 -

Note that  $G_i^{(\gamma)}$  denotes the MMSE equalizer matrix at stage  $\gamma$  for the sub-block  $r$  of vector  $y$  of size  $N/2^\gamma$ .

It is important to note that each stage can be  
 5 sequenced in many ways following the graphic illustration of FIG. 3 using a binary tree. Each path in the binary tree results into another instantiation of the proposed algorithm. The depth in terms of number of stages and the number of times each of the  
 10 stages has to be iterated can be determined by a complexity/performance trade-off criterion.

Thus in order to refine the decoding, the same mechanisms can be applied to blocks of size  $N/4$ , and  
 15 then  $N/8$ , etc. leading to a higher resolution of the decoding.

Clearly, increasing the number of stages and iterations yields a more robust estimation procedure.  
 20 However, simulations show that the bit error rate converges after a few iterations, so to improve again the decoded vector, fortunately in practice only the second stage of the algorithm needs to be considered.

25 A fast algorithm for computing the product of vector  $y_l$  by matrix  $G_i^{(\gamma)}$  be implemented as follows.

Firstly, the expression of matrices  $G_i^{(\gamma)}$  is examined, by fairly assuming that at each stage:

30     •  $E([s_k - \hat{s}_k][s_k^H - \hat{s}_k^H]) \approx \rho(p_k)I_{N/2^\gamma}$

- 13 -

- $E(s_k \hat{s}_k) \approx 0$  for  $k \neq k'$
- $E(\hat{s}_k b^H) \approx 0$

where  $E$  is the expectation operator and  $\rho$  is a function of  $p_k$ , the bit error probability for the  $k^{\text{th}}$  block after its last equalization, depending on the constellation used.

Under these assumptions, it is possible to calculate the expression of the MMSE equalization matrix used at each stage:

$$G_k^{(\gamma)} = \begin{bmatrix} 0_{\frac{N}{2^\gamma} \times \frac{(k-1)N}{2^\gamma}} & I_{\frac{N}{2^\gamma}} & 0_{\frac{N}{2^\gamma} \times \frac{(2^\gamma-k)N}{2^\gamma}} \end{bmatrix} M^H (M D_k^{(\gamma)} M + \sigma^2 I_N)^{-1}$$

where  $D_k^{(\gamma)}$  is the following block-diagonal matrix :

$$D_k^{(\gamma)} = \text{diag} \left( \rho(p_1) I_{\frac{N}{2^\gamma}} \quad \dots \quad \rho(p_{k-1}) I_{\frac{N}{2^\gamma}} \quad I_{\frac{N}{2^\gamma}} \quad \rho(p_{k+1}) I_{\frac{N}{2^\gamma}} \quad \dots \quad \rho(p_{2^\gamma}) I_{\frac{N}{2^\gamma}} \right)$$

Simulations show that the terms  $\rho(p_k)$  do not play an important role in overall performance, and thus can be neglected (replaced by 0), which greatly simplifies the calculus of the matrix products. It can be shown that in this case, when defining the  $\frac{N}{2^\gamma} \times \frac{N}{2^\gamma}$  diagonal matrix:

$$\Delta_\gamma = \text{diag} \left\{ \frac{1}{\sigma^2 + \frac{1}{2^\gamma} \sum_{k=0}^{2^\gamma-1} |h_{i+kN/2^\gamma}|^2} \right\}_{i=1}^{N/2^\gamma}$$

the following general result is obtained:

- 14 -

$$\begin{bmatrix} G_1^{(\gamma)} \\ \dots \\ G_{2^r}^{(\gamma)} \end{bmatrix} = W \begin{bmatrix} \Delta_\gamma & 0 & 0 \\ 0 & \dots & 0 \\ 0 & 0 & \Delta_\gamma \end{bmatrix} H^*$$

Thus the product by  $G_i^{(\gamma)}$  reduces simply to the product of  $y_i$  by a diagonal matrix depending on the channel coefficients (computed and stored once only) followed by the products of a subset of a Walsh-Hadamard matrix of size  $\frac{N}{2^r} \times N$ . Therefore, the procedure detailed in the two previous equations results in a simple low arithmetical complexity way for performing the various MMSE equalizations steps. Instead of the expected heavy arithmetic complexity order of  $N^3$  required by the  $G_i^{(\gamma)}$  product, a much simpler complexity of order  $2^r N \log_2 \left( \frac{N}{2^r} \right)$  at each stage results.

The complexity of the multi-resolution decoding algorithm described above can be estimated as follows. The arithmetical simplifications due to the Walsh-Hadamard structure lead to quite a low complexity. At each stage  $\gamma$  of the algorithm, the complexity  $C(\gamma, N)$  of one iteration (i.e.,  $2^r$  calculus of  $y$ , of  $G_i^{(\gamma)} y$  and decisions) can be overestimated:

$$C(\gamma, N) \approx N \left( 2^r \left( 2 \log_2 \left( \frac{N}{2^r} \right) + 6 \right) + 2 + \frac{3}{2^r} \right) \times AddR + N \left( 3 \times 2^r + 4 + \frac{5}{2^r} \right) \times MulR + N \times Decision$$

where  $AddR$  is the complexity of an addition of two real values (assumed equal to that of a subtraction),  $MulR$  is the complexity of a multiplication, and  $Decision$



- 15 -

is the complexity of a hard decision on a complex value (the choice of a symbol).

There follows an illustration of the performance improvement provided by the above-described multi-resolution decoding algorithm in the context of a 5.2GHz, 20MHz bandwidth, 64 carrier with 800ns guard time HIPERLAN/2 OFDM system using a QPSK constellation. Simulations were run using 2 channel profiles: (i) a perfect time interleaved BRAN 'E' channel model, and (ii) pure independent Rayleigh fadings in the frequency domain. The results in terms of bit error rate (BER) for uncoded scenarios as a function of the ratio  $\frac{E_b}{N_0}$  (energy per bit / noise energy) are provided FIG. 4 and FIG. 5.

A clear improvement can be observed by applying the new decoding strategy compared with OFDM and MMSE SOFDM systems using a Walsh-Hadamard spreading sequence: for a target BER of  $10^{-4}$ , more than 3dB is gained compared to MMSE SOFDM applying one or two iterations at the three first stages.

This means that for the same fixed BER and a given C/I (carrier to interference), 16QAM SOFDM with multiresolution decoding would have the same performance of a QPSK SOFDM MMSE transmission scheme while providing an enhancement of 4 times in bit rate. Such a significant improvement illustrates how improved decoding schemes for existing systems can

- 16 -

translate directly in greater system capacity under a given QoS constraint.

It will be understood that the multi-resolution decoding  
5 algorithm for OFDM-CDMA, spread OFDM single user systems described above provides the following advantages:  
The following technical merits of the new multi-resolution decoding algorithm can be highlighted:

- 10 • Low arithmetical complexity compared to existing SIC BLAST techniques with same or better performance.
- Flexibility and scalability of the method (it is possible to adjust the number of iterations to be performed based on a performance/complexity tradeoff).
- 15 • Can be combined into all OFDM standards as a proprietary transmission mode (since it can be viewed as a simple extension of current OFDM systems).
- Yields a significant PER performance enhancement  
20 compared to classical OFDM and minimum mean square error (MMSE) SOFDM receivers (e.g., 3dB).

- 17 -

**Claims**

1. A spread OFDM wireless communication system (100) comprising:
- 5 at a transmitter (110-140)  
means for transmitting a spread OFDM signal;  
at a receiver (160-180)  
means for receiving the spread OFDM signal;  
means for equalizing the spread OFDM signal  
10 means for splitting the equalized spread OFDM  
signal into a first plurality of portions  
including a first portion and a second portion;  
means for making a decision on the second  
portion to produce a decided second portion;  
15 means for subtracting the decided second  
portion from the received spread OFDM signal to  
produce a first difference signal; and  
means for equalising and processing the first  
difference signal to recover the first portion  
20 of the received signal in which interference  
due to second portion interfering terms is  
substantially reduced.
2. The system of claim 1 further comprising:
- 25 at the receiver (160-180)  
means for making a decision on the first  
portion to produce a decided first portion;  
means for subtracting the first portion from  
the equalised spread OFDM signal to produce a  
30 second difference signal; and

- 18 -

means for equalising and processing the second difference signal to recover the second portion of the received signal in which interference due to first portion interfering terms is  
5 substantially reduced.

3. The system of claim 2 wherein the receiver (160-180) further comprises means for repeating processing a predetermined number of further times, with the recovered  
10 first and second portions in place of the decided first and second portions, to recover more reliable estimates for the first and second portions.

4. The system of claim 1, 2 or 3 further comprising:  
15 at the receiver (160-180)  
means for splitting the recovered received signal into a second plurality of portions greater in number than the first plurality of portions and including a first subsequent  
20 portion, a second subsequent portion, a third portion and a fourth portion;  
means for subtracting the second subsequent portion, the third portion and the fourth portion from the received signal to produce a  
25 first subsequent difference signal; and  
means for processing the first subsequent difference signal to recover the first subsequent portion of the recovered received signal in which interference due to second,  
30 third and fourth portion interfering terms is substantially reduced;

- 19 -

means for making a decision on the first subsequent portion to produce a decided first subsequent portion;

5 means for subtracting the first subsequent portion, the third portion and the fourth portion from the received signal to produce a second subsequent difference signal; and

means for processing the second subsequent difference signal to recover the second subsequent portion of the recovered received signal in which interference due to first, third and fourth portion interfering terms is substantially reduced;

10 means for making a decision on the second subsequent portion to produce a decided second subsequent portion;

means for subtracting the first subsequent portion, the second subsequent portion and the fourth portion from the received signal to produce a third difference signal;

20 means for processing the third difference signal to recover the third portion of the recovered received signal in which interference due to first, second and fourth portion interfering terms is substantially reduced;

25 means for making a decision on the third portion to produce a decided third portion;

means for subtracting the first subsequent portion, the second subsequent portion and the third portion from the received signal to produce a fourth difference signal;

30

- 20 -

means for processing the fourth difference  
signal to recover the fourth portion of the  
recovered received signal in which interference  
due to first, second and third portion  
5 interfering terms is substantially reduced; and  
means for making a decision on the fourth  
portion to produce a decided fourth portion.

5. The system of claim 4 wherein the receiver (160-180)  
10 further comprises means for repeating processing a  
predetermined number of further times, with the decided  
first subsequent portion, the decided second subsequent  
portion, the decided third portion and the decided fourth  
portion in place of the recovered first subsequent  
15 portion, the recovered second subsequent portion, the  
recovered third portion and the recovered fourth portion  
respectively, to recover more reliable estimates for the  
first subsequent portion, the second subsequent portion,  
the third portion and the fourth portion.

20

6. The system of claim 4 wherein the second plurality  
of portions is an integer multiple of 2 that is greater  
than 2.

25 7. The system of any preceding claim wherein the means  
for equalising and processing comprises:  
first matrix multiplication means for multiplying by  
a first diagonal matrix having elements dependent on  
channel coefficients; and

- 21 -

second matrix multiplication means for multiplying  
by a second matrix which is a subset of a Walsh  
Hadamard matrix.

- 5 8. The system of any preceding claim wherein the means  
for equalising and processing comprises means for  
performing minimum mean square error equalization.
9. The system of any preceding claim wherein the means  
10 for transmitting a spread OFDM signal comprises means for  
spreading by performing a Walsh Hadamard transform.

- 22 -

10. A spread OFDM wireless communication system (100)  
comprising:

at a transmitter (110-140)

means for transmitting a spread OFDM signal;

5 at a receiver (160-180)

means for performing minimum mean square error  
equalization having:

10 first matrix multiplication means for  
multiplying by a first diagonal matrix  
having elements dependent on channel  
coefficients; and

second matrix multiplication means for  
multiplying by a second matrix which is a  
subset of a Walsh Hadamard matrix.

15



- 23 -

11. A receiver (160-180) for use in a spread OFDM wireless communication system (100), the receiver comprising:

5 means for receiving a wireless spread OFDM signal;  
means for equalizing the spread OFDM signal  
means for splitting the equalized spread OFDM signal into a first plurality of portions including a first portion and a second portion;  
10 means for making a decision on the second portion to produce a decided second portion;  
means for subtracting the decided second portion from the received spread OFDM signal to produce a first difference signal; and  
15 means for equalising and processing the first difference signal to recover the first portion of the received signal in which of interference due to second portion interfering terms is substantially reduced.  
20

12. The receiver of claim 11 further comprising:  
means for making a decision on the first portion to produce a decided first portion;  
means for subtracting the first portion from  
25 the equalised spread OFDM signal to produce a second difference signal; and  
means for equalising and processing the second difference signal to recover the second portion of the received signal in which interference  
30 due to first portion interfering terms is substantially reduced.

- 24 -

13. The receiver of claim 12 wherein the receiver further comprises means for repeating processing a predetermined number of further times, with the recovered  
5 first and second portions in place of the decided first and second portions, to recover more reliable estimates for the first and second portions.

14. The receiver of claim 11, 12 or 13 further  
10 comprising:

means for splitting the recovered received signal into a second plurality of portions greater in number than the first plurality of portions and including a first subsequent  
15 portion and a second subsequent portion, a third portion and a fourth portion;  
means for subtracting the second subsequent portion, the third portion and the fourth portion from the recovered received signal to  
20 produce a first subsequent difference signal;  
and  
means for processing the first subsequent difference signal to recover the first  
subsequent portion of the recovered received  
25 signal in which interference due to second, third and fourth portion interfering terms is substantially reduced;  
means for making a decision on the first subsequent portion to produce a decided first  
30 subsequent portion;

- 25 -

means for subtracting the first subsequent portion, the third portion and the fourth portion from the received signal to produce a second subsequent difference signal;

5 means for processing the second subsequent difference signal to recover the second subsequent portion of the recovered received signal in which interference due to first, third and fourth portion interfering terms is

10 substantially reduced;

means for making a decision on the second subsequent portion to produce a decided second subsequent portion;

means for subtracting the first subsequent

15 portion, the second subsequent portion and the fourth portion from the received signal to produce a third difference signal;

means for processing the third difference signal to recover the third portion of the

20 recovered received signal in which interference due to first, second and fourth portion interfering terms is substantially reduced;

means for making a decision on the third portion to produce a decided third portion;

25 means for subtracting the first subsequent portion, the second subsequent portion and the third portion from the received signal to produce a fourth difference signal;

means for processing the fourth difference

30 signal to recover the fourth portion of the recovered received signal in which interference

- 26 -

due to first, second and third portion  
interfering terms is substantially reduced; and  
means for making a decision on the fourth  
portion to produce a decided fourth portion.

5

15. The receiver of claim 14 further comprising means  
for repeating processing a predetermined number of  
further times, with the decided first subsequent portion,  
the decided second subsequent portion, the decided third  
10 portion and the decided fourth portion in place of the  
recovered first subsequent portion, the recovered second  
subsequent portion, the recovered third portion and the  
recovered fourth portion respectively, to recover more  
reliable estimates for the first subsequent portion, the  
15 second subsequent portion, the third portion and the  
fourth portion.

16. The receiver of any one of claims 11-15 wherein the  
means for equalising and processing comprises:

20 first matrix multiplication means for multiplying by  
a first diagonal matrix having elements dependent on  
channel coefficients; and  
second matrix multiplication means for multiplying  
by a second matrix which is a subset of a Walsh  
25 Hadamard matrix.

17. The receiver of any one of claims 11-16 wherein the  
means for equalising and processing comprises means for  
performing minimum mean square error equalization.

30

- 27 -

18. A receiver (160-180) for use in a spread OFDM  
wireless communication system, the receiver comprising:  
means for performing minimum mean square error  
equalization having:

5           first matrix multiplication means for  
            multiplying by a first diagonal matrix having  
            elements dependent on channel coefficients; and  
            second matrix multiplication means for  
            multiplying by a second matrix which is a  
10           subset of a Walsh Hadamard matrix.

- 28 -

19. A method of operating a receiver (160-180) in a spread OFDM wireless communication system (100), the method comprising:

5 receiving a wireless spread OFDM signal;  
equalizing the spread OFDM signal  
splitting the equalized spread OFDM signal into  
a first plurality of portions including a first  
portion and a second portion;  
making a decision on the second portion to  
10 produce a decided second portion;  
subtracting the decided second portion from the  
received spread OFDM signal to produce a first  
difference signal; and  
15 equalising and processing the first difference  
signal to recover the first portion of the  
received signal in which of interference due to  
second portion interfering terms is  
substantially reduced.

20 20. The method of claim 19 further comprising:  
making a decision on the first portion to  
produce a decided first portion;  
subtracting the first portion from the  
equalised spread OFDM signal to produce a  
25 second difference signal; and  
equalising and processing the second difference  
signal to recover the second portion of the  
received signal in which interference due to  
first portion interfering terms is  
30 substantially reduced.

- 29 -

21. The method of claim 20 further comprising repeating processing a predetermined number of further times, with the recovered first and second portions in place of the decided first and second portions, to recover more  
5 reliable estimates for the first and second portions.

22. The method of claim 19, 20 or 21 further comprising:  
splitting the recovered received signal into a  
second plurality of portions greater in number  
10 than the first plurality of portions and  
including a first subsequent portion and a  
second subsequent portion, a third portion and  
a fourth portion;  
subtracting the second subsequent portion, the  
15 third portion and the fourth portion from the  
recovered received signal to produce a first  
subsequent difference signal; and  
processing the first subsequent difference  
signal to recover the first subsequent portion  
20 of the recovered received signal in which  
interference due to second, third and fourth  
portion interfering terms is  
substantially reduced;  
making a decision on the first subsequent  
25 portion to produce a decided first subsequent  
portion;  
subtracting the first subsequent portion, the  
third portion and the fourth portion from the  
received signal to produce a second subsequent  
30 difference signal;

- 30 -

processing the second subsequent difference  
signal to recover the second subsequent portion  
of the recovered received signal in which  
interference due to first, third and fourth  
5 portion interfering terms is substantially  
reduced;  
making a decision on the second subsequent  
portion to produce a decided second subsequent  
portion;  
10 subtracting the first subsequent portion, the  
second subsequent portion and the fourth  
portion from the received signal to produce a  
third difference signal;  
processing the third difference signal to  
15 recover the third portion of the recovered  
received signal in which interference due to  
first, second and fourth portion interfering  
terms is substantially reduced;  
means for making a decision on the third  
20 portion to produce a decided third portion;  
means for subtracting the first subsequent  
portion, the second subsequent portion and the  
third portion from the received signal to  
produce a fourth difference signal;  
25 processing the fourth difference signal to  
recover the fourth portion of the recovered  
received signal in which interference due to  
first, second and third portion interfering  
terms is substantially reduced; and  
30 making a decision on the fourth portion to  
produce a decided fourth portion.



- 31 -

23. The method of claim 22 further comprising repeating  
processing a predetermined number of further times, with  
the decided first subsequent portion, the decided second  
5 subsequent portion, the decided third portion and the  
decided fourth portion in place of the recovered first  
subsequent portion, the recovered second subsequent  
portion, the recovered third portion and the recovered  
fourth portion respectively, to recover more reliable  
10 estimates for the first subsequent portion, the second  
subsequent portion, the third portion and the fourth  
portion.

24. The method of claim 22 wherein the second plurality  
15 of portions is an integer multiple of 2 that is greater  
than 2.

25. The method of any one of claims 19-24 comprising:  
multiplying by a first diagonal matrix having  
20 elements dependent on channel coefficients; and  
multiplying by a second matrix which is a subset of  
a Walsh Hadamard matrix.

26. The method of any one of claims 19-25 comprising  
25 performing minimum mean square error equalization.

- 32 -

27. A method for performing minimum mean square error equalization in a spread OFDM wireless communication system (100), the method comprising:

- 5       multiplying by a first diagonal matrix having elements dependent on channel coefficients; and  
multiplying by a second matrix which is a subset of a Walsh Hadamard matrix.

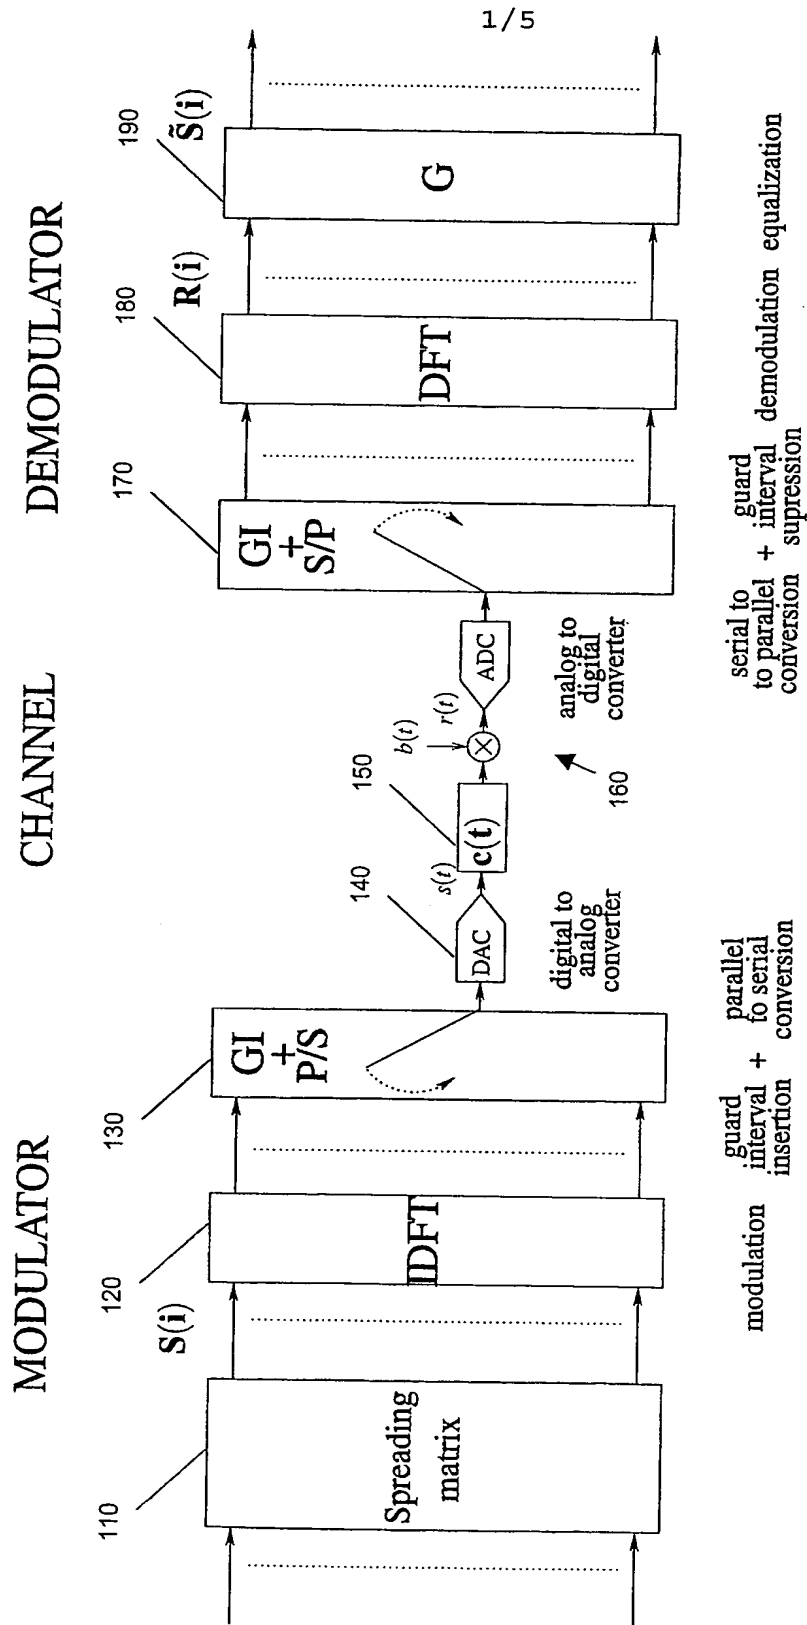


FIG. 1

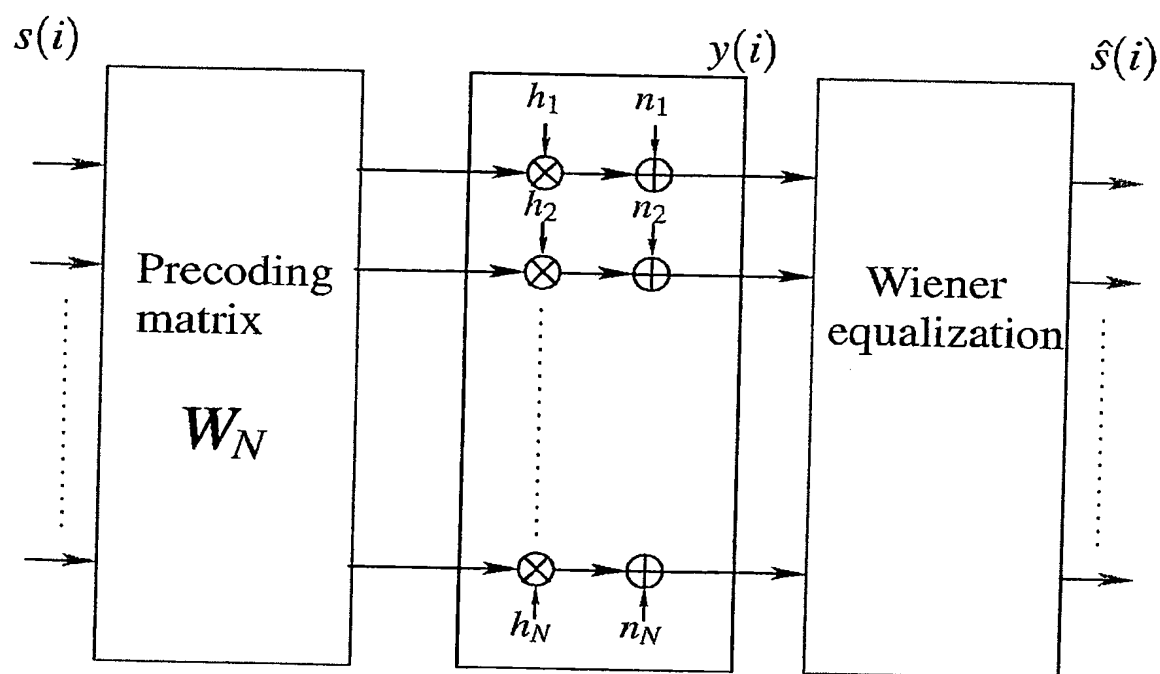


FIG. 2

3/5

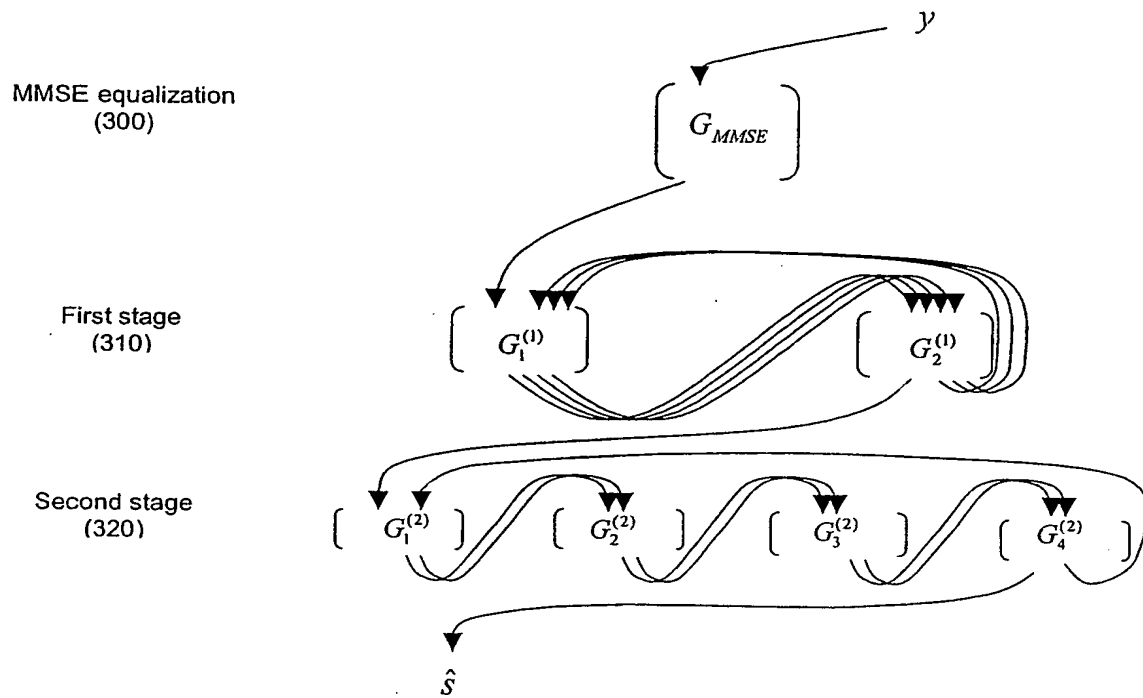


FIG. 3

4/5

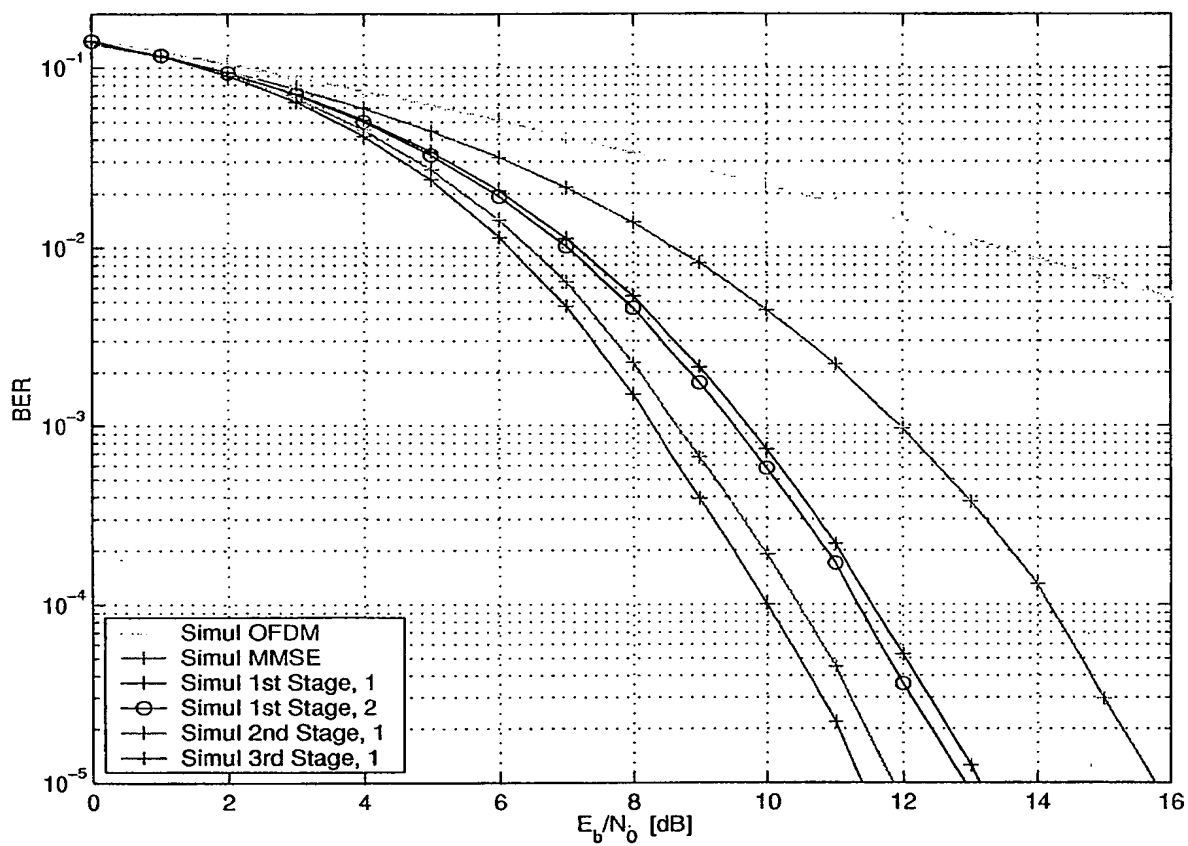


FIG. 4

5/5

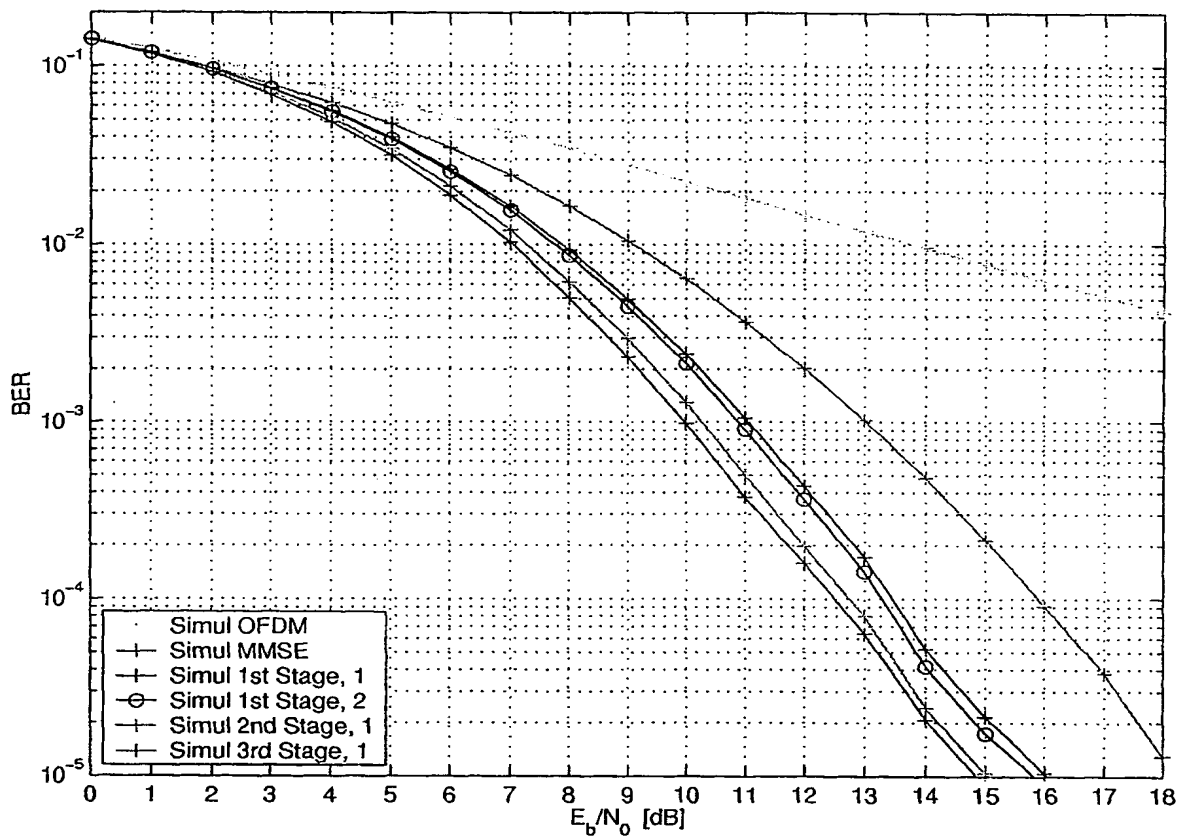


FIG. 5

## INTERNATIONAL SEARCH REPORT

Application No

PCT/EP 03/00596

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04L5/02 H04L27/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BAUDAIS J-Y ET AL: "AN IMPROVED LINEAR MMSE DETECTION TECHNIQUE FOR MULTI-CARRIER CDMA SYSTEMS: COMPARISON AND COMBINATION WITH INTERFERENCE CANCELLATION SCHEMES" , EUROPEAN TRANSACTIONS ON TELECOMMUNICATIONS, EUREL PUBLICATION, MILANO, IT, VOL. 11, NR. 6, 1 NOV. 2000, PAGE(S) 547-554 XP001006826 ISSN: 1124-318X abstract	1-3, 7-13, 16-21, 25-27
A	* Section 2. System description * * Section 6. Multi-user detection *	4-6, 14, 15, 22-24

☒ Further documents are listed in the continuation of box C.

☐ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

23 May 2003

Date of mailing of the international search report

03/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Palacián Lisa, M



## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>KALOFONOS D N ET AL: "Performance of the multi-stage detector for a MC-CDMA system in a Rayleigh fading channel", GLOBAL TELECOMMUNICATIONS CONFERENCE, 1996. GLOBECOM '96. 'COMMUNICATIONS: THE KEY TO GLOBAL PROSPERITY LONDON, UK 18-22 NOV. 1996, NEW YORK, NY, USA, IEEE, US, PAGE(S) 1784-1788 XP010220186  ISBN: 0-7803-3336-5  abstract  * Section 2. System Description *  * Section 3. The Multi-Stage Detector *</p>	1-3, 7-13, 16-21, 25-27
X	<p>BURY A ET AL: "Block transmission equalizers using constrained minimum variance filters with application to MC-CDMA", VOL. 1, 06-08 SEPT. 2000, PAGE(S) 159-163 XP010517542  abstract  * Section II. Transmission model *  * Section IV. Block equalizer *</p>	1-3, 7-13, 16-21, 25-27
X	<p>HÉLARD J-F ET AL: "Linear MMSE detection technique for MC-CDMA", ELECTRONICS LETTERS, IEE STEVENAGE, GB, VOL. 36, NR. 7, 30 MARCH 2000, PAGE(S) 665-666  XP006015082  ISSN: 0013-5194  the whole document</p>	10,18,27
A	<p>GINIS G ET AL: "ON THE RELATION BETWEEN V-BLAST AND THE GDFE", IEEE COMMUNICATIONS LETTERS, IEEE SERVICE CENTER, PISCATAWAY, US, US, VOL. 5, NR. 9, SEPT. 2001 PAGE(S) 364-366 XP001107969  ISSN: 1089-7798  the whole document</p>	1-27